


ECO SOLVENT

SONIQ HQ PLUS

TRUE 3.2 MTR ECO SOLVENT PRINTING MACHINE

PROFESSIONAL QUALITY BEYOND COMPARE

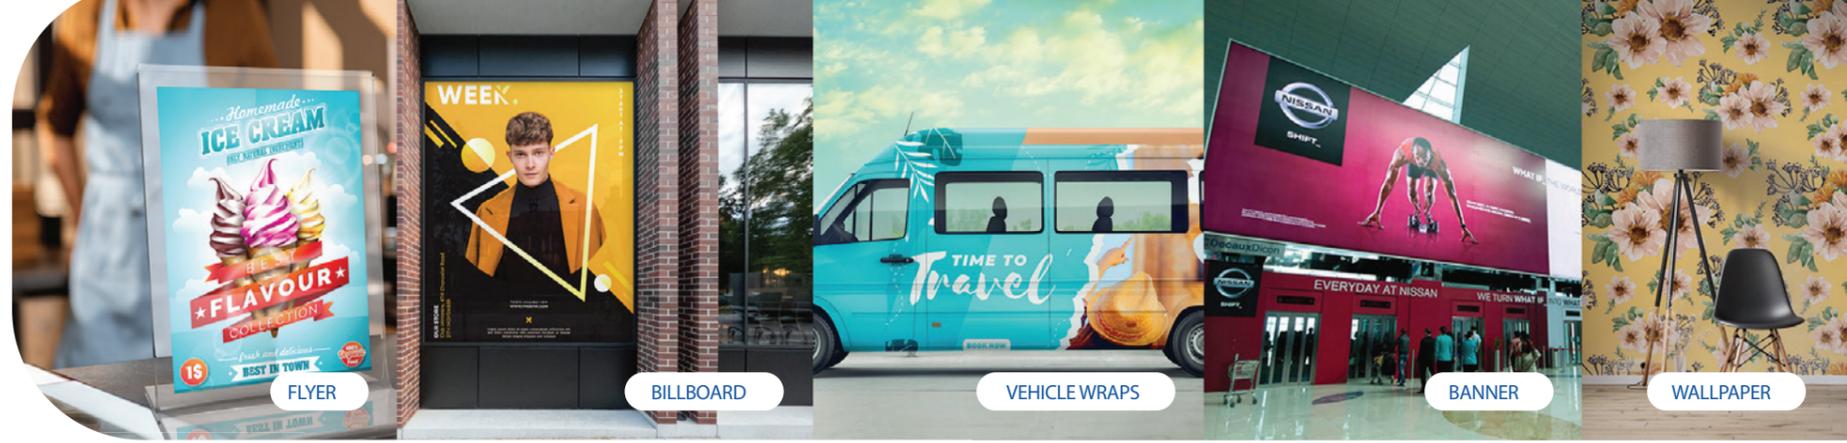


Super-fast speed and vibrant prints of **SONIQ HQ PLUS** make it the go-to solution for indoor & outdoor printing needs. The configuration supports CMYK options with speeds achieving upto 915 Sqft/hr.

SONIQ HQ PLUS is the most suitable choice for a large array of ECO-solvent applications like Fabric, Canvas, SAV, PAV Banner, Window Film, Backlit both Eco-Solvent & Solvent Base.

PREMIUM FEATURES:

6 PL RAZOR-SHARP PRINT

Capable of **6 picoliter droplets** that produce higher-resolution prints. The smallest picoliter is able to express clear thin lines, remarkable details, and needle-sharp text.

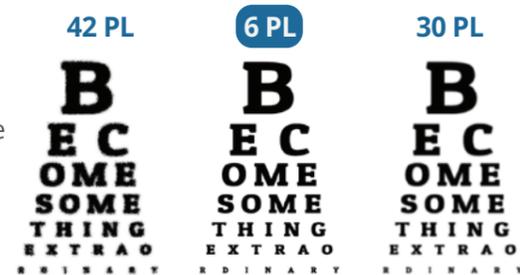

BioPrint™ Technology is specially created for prints on **Bio-Degradable and 100% Recyclable** Fabric media offers future-proof sustainable solutions to all the print business problems.



SONIQ HQ PLUS which is equipped with **GreenTech™** is compliant with all International Print Standards for providing perfect print solutions to the customers as per the industry and environmental norms.

SPECIFICATIONS

Model		SoniQ HQ Plus		
Model		S4427		
Printing Technology		Drop-on-demand, Piezo electric inkjet		
Print Heads		Industrial Grade Jetting Assemblies		
Fabric	Width	3300 mm (129 in)		
	Thickness	Maximum 3.00 mm with Liner (Flexible)		
	Roll Outer Diameter	Maximum 300 mm (12 in), 50.8 (2 in)		
	Roll Weight	Maximum 90 kg		
	Core Diameter	76.2 mm (3 in)		
	Types	Fabric, SAV, Canvas, PVC Banner, Window Film		
Printing Width		Maximum 3200 mm (126 in)		
Inks	Type	Eco Solvent		
	No. of Colors	4 Colors (CMYK)		
Printing Resolution (dots per inch)		Maximum 1440 dpi		
Distance Accuracy		Error of less than ± 0.3% of distance travelled, or ± 0.3 mm whichever is great		
Media Heating System		Pre-Heater and Post-Heater, setting range for the pre-set temperature: 30°C to 60°C Dryer setting range for the pre-set temperature: 30°C to 60°C		
Connectivity		High Speed USB		
Power Requirements		AC 220 v ±10%, 20 A, 50/60 Hz		
Printer Dimensions		4525 mm x 885 mm x 1500 mm (L x W x H)		
RIP Software		ONYX		
Weight (Gross)		642 Kgs		
Environmental	Power ON	Temperature: 18°C to 28°C Humidity: 20 to 80% RH (non-condensing)		
	Power OFF	Temperature: 5°C to 40°C Humidity: 20 to 80% RH (non-condensing)		
Modes	DPI	Passes	Sqm/hr	Sqft/hr
Mode 1	720 x 720	2	85	915
Mode 2	720 x 1080	3	55	592
Mode 3	720 x 1440	4	45	485
Mode 4	720 x 1080	6	28	300
Mode 5	720 x 1440	8	23	248



For SoniqHQ Plus Scan Here